


REVO ULTRA PRO 16MP 4-CH MULTI DIRECTIONAL 180° IP Camera

Model Number: RUCS4IN1C-1WM

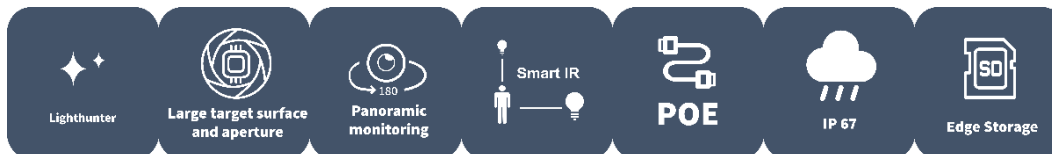

Features

- High quality image with 16MP, 1/1.8" CMOS sensor 4800*2688@30fps in the main stream offers 180° panoramic view, and 16:9 ratio can better fit the screen
- Smart IR, up to 165ft (50m) IR distance
- Built-in fan, allows dissipating heat and eliminating the mist of window
- Ultra 265, H.265, H.264, MJPEG
- 2D/3D DNR (Digital Noise Reduction)
- AC24V, DC24V or PoE(IEEE 802.3at) power supply
- Micro SD, up to 256 GB
- Alarm 2 in and 1 out, Audio 1 in and 1 out
- IP67 ingress protection

Specifications

Camera	Description
Sensor	1/1.8"CMOS
Min. Illumination	Color: 0.001lux (F1.6,AGC ON) 0lux with IR
Day/Night	IR-cut filter with auto switch (ICR)
Shutter	Auto/Manual, 1 ~ 1/100000s
WDR	DWDR
S/N	>56dB
Lens	Description
Iris Type	Fixed
Lens type	2.8mm
Iris	F1.6
Field of View (H)	180°
Field of View (V)	90°
Field of View (D)	221.4°
DORI	Description
DORI Distance (Lens)	2.8mm
DORI Distance (Detect)	63.0m(206.7ft)
DORI Distance (Observe)	25.2m(82.7ft)
DORI Distance (Recognize)	12.6m(41.3ft)
DORI Distance (Identify)	6.3m(20.7ft)
Illuminator	Description
Illumination Distance(IR)	50m
Wavelength	850nm
IR On/Off Control	Auto/Manual
Video	Description
Video Compression	Ultra 265;H.265;H.264;MJPEG
Frame Rate—Main Stream	4800×2688,Max. 30 fps
Frame Rate—Sub Stream	2688×1520,Max. 30 fps
Frame Rate—Third Stream	1280×720,Max. 30 fps
Video Bit Rate	128 Kbps~16 Mbps
U-code	Support
ROI	Up to 8 areas
Video stream	Triple streams
OSD	Up to 10 OSDs
Privacy Mask	Up to 8 areas(8 blacks/8 mosaics)
Image	Description

White Balance	Auto; Outdoor; Fine Tune; Sodium Lamp; Locked; Auto2
Digital noise reduction	2D/3D DNR
Smart IR	Support
Flip	Normal Flip ; Vertical Flip ; Horizontal ;180°
HLC	Support
BLC	Support
Defog	Digital Defog
Heatwave Reduction	N/A
Events	Description
Basic Detection	Motion detection; Tampering alarm; Audio detection
General Function	Watermark; IP Address Filtering; Access Policy; ARP Protection ;RTSP Authentication; User Authentication; HTTP authentication ;Alarm input; Alarm output
Audio	Description
Audio Compression	G.711U;G.711A
Audio Bitrate	128 Kbps
Two-way Audio	Support
Suppression	Support
Sampling Rate	16KHZ
Storage	Description
Edge Storage	Micro SD, up to 256 GB
Network Storage	ANR;NAS(NFS)
Network	Description
Protocols	SSH;IGMP;RTP;RTCP;SMTP;IPv4;IPv6;ICMP;ARP;TCP;UDP;DHCP;PPPoE;RTSP;RTMP;DNS;DDNS;NTP;FTP;UPnP;HTTP;HTTPS;802.1x;SNMP;QoS;SSL/TLS
Compatible Integration	ONVIF (Profile S, Profile G, Profile T);API
User/Host	Up to 32 users. 3 user levels: administrator, common user and operator
Security	TLS1.3;Password protection; Strong password; HTTPS encryption ;Export operation logs; Basic and digest authentication for RTSP; Digest authentication for HTTP;TLS 1.2;WSSE and digest authentication for ONVIF
Client	REVO ULTRA APP, MYREVOCLOUD.COM, REVO ULTRA REMOTE
Web Browser	Plug-in required live view: IE 10 and above, Chrome 45 and above, Firefox 52 and above, Edge 79 and above; Plug-in free live view: Chrome 57.0 and above, Firefox 58.0 and above ,Edge 16 and above
Interface	Description
Audio I/O	1 Input: impedance 35k Ω ; amplitude 2V [p-p];1 Output: impedance 600 Ω ; amplitude 2V [p-p]
Alarm I/O	2/1
Serial Port	1 channel RS485 interface
Network	10M/100M/1000M Base-TX Ethernet
Protection	IP67 (IEC 60529:1989+AMD1:1999+AMD2:2013)
General	Description
Power	AC24V \pm 25%/DC24V \pm 25%, PoE(IEEE 802.3at)

Power Consumption	Max 27W
Power Interface	Two-core terminal block
Dimensions	10.2" × 8.3" × 4.5" (258.8mmx211.0mmx115.0mm)
Weight	5.01lb (2.271kg)
Working Environment	-40° F ~ 158° F, (-40°C ~ 70°C) Humidity: ≤95% RH (non-condensing)
Storage Environment	-40° F ~ 158° F (-40°C ~ 70°C), Humidity: ≤95% RH (non-condensing)
Surge protection	6KV
Reset button	Support

Dimensions

