


Network Video Recorder

RU4NVR2

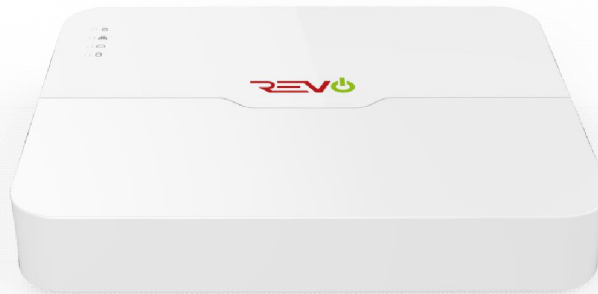

Key Features

4-channel input

Plug & Play with 4 Independent PoE network Ports

Third-party IP cameras supported with ONVIF conformance

Support 1-ch VGA, 1-ch HDMI at up to 4 K (3840x2160) resolutions

Up to 8 Megapixels resolution recording

Accurate retrieval, instant playback

1 SATA HDD up to 6 TB

Plug & Play with up to 8 independent PoE network interfaces

Support for P2P, UPnP, NTP, DHCP, PPPoE

Two-Step Smartphone View Setup – iPhone and Android

Myrevocloud.com – Access your Ultra NVR from virtually any internet Explorer browser

REVO ULTRA EZStation Computer Software – Conveniently view multiple units at once

Specifications

RU4NVR2	
Video and Audio	
IP Video Input	4-ch
Two-way audio Input	1-ch, RCA
Network	
Incoming bandwidth	60Mbps
Outgoing bandwidth	64Mbps
Remote connection	128
Video/Audio Output	
HDMI/VGA Output	VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz HDMI: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz,
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch, RCA
Synchronous Playback	8-ch
Decoding	
Compression	H.265/H.264
Live view/ Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	1 x 4K@30, 3 x 4MP@20, 4 x 1080p@25, 8 x 720p@25
Hard Disk	
SATA	1 SATA interface
Capacity	up to 6TB for each disk
External Interface	
Network Interface	1 RJ-45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel: 2 x USB2.0
PoE	
Interface	4 independent 100 Mbps PoE network interfaces
Max Power	Max 30 W for single port Max 54W in total (13.5 W for each)
Supported Standard	IEEE 802.3at
General	
Power Supply	48V DC
Consumption (without HDD and PoE)	≤ 8 W
Working Temperature	+14°F ~ +131°F (-10°C ~ + 55°C)
Working Humidity	10% ~ 90%
Dimensions	42 x 205 x 205mm (1.7" x 8.1" x 8.1")
Weight (without HDD)	1.3 lb (0.59kg)

Dimensions

